

HTE Series

High Voltage / Thick Film Resistors




- Resistances from 200Ohms to 700MOhms
- Power Rating 0.7 to 17Watts
- Resistance Tolerances to $\pm 1\%$
- Low TCR: $\pm 100\text{ppm/K}$ Standard
- Voltage Ratings to 48KV
- Non-Inductive Design
- SMD upon request



SPECIFICATIONS

Type	Wattage Rating (Watts)	Dimensions (special dimensions possible)			Maximum Working Voltage (KV ACrms)
		A $\pm 0.062''$ [$\pm 1.6\text{mm}$]	B $\pm 0.031''$ [$\pm 0.8\text{mm}$]	C $\pm 0.002''$ [$\pm 0.05\text{mm}$]	
HTE15	0.7	0.590 [15.0]	0.197 [5.0]	0.032 [0.8]	2.5
HTE19	1	0.748 [19.0]	0.197 [5.0]	0.032 [0.8]	3.5
HTE24	2	0.944 [24.0]	0.314 [8.0]	0.040 [1.0]	5.5
HTE25	1.2	1.00 [25.4]	0.197 [5.0]	0.032 [0.8]	5.5
HTE39	3	1.535 [39.0]	0.314 [8.0]	0.040 [1.0]	10
HTE52	5	2.05 [52.0]	0.314 [8.0]	0.040 [1.0]	15
HTE76	8	2.99 [76.0]	0.354 [9.0]	0.040 [1.0]	22.5
HTE102	12	4.02 [102]	0.354 [9.0]	0.040 [1.0]	32
HTE127	12	5.00 [127]	0.354 [9.0]	0.040 [1.0]	40
HTE152	15	5.98 [152]	0.354 [9.0]	0.040 [1.0]	48

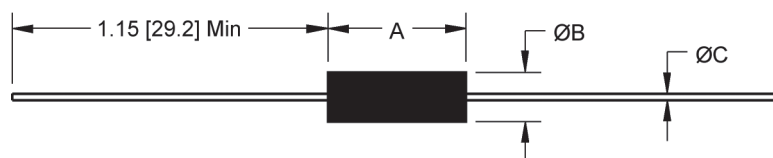

Ordering Information

Part Number - Resistance - Tolerance - TCR (If not standard)

Example: HTE39 10MOhm 1%

SPECIFICATIONS (continued)

Specification	Value
Resistance Range	200 Ohms to 700MOhms
Tolerances	±1% to ±10%
Temperature Coefficient	±100ppm/K : -25°C to +125°C (Standard) ±20 to ±150 ppm/K (On Request)
Temperature Range	-55°C to +195°C
Insulation Resistance	>10000 MOhms
Encapsulation	Epoxy Conformal Coating / silicon or glass upon request
Environmental Performance (MIL-STD 202)	ΔR
Load Life	±0.7%
Moisture Resistance	±0.4%
Thermal Shock	±0.4%
5X Overload (5s)	±0.5%

